

# Perkins 400C och 400D

Modell HB – HR och GG - GS

## Ventilspel

0,20 mm på både insug och avgas

## Åtdragningsmoment topplock




Illustration 105

g01116726

Typical example for the 2 cylinder head

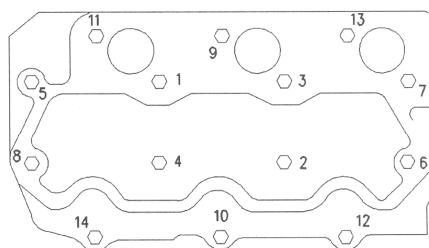


Illustration 106

g00854316

Typical example for the 3 cylinder head

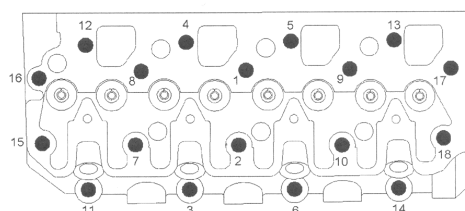


Illustration 107

g01109567

**402C-05 / 402D-05**

- 37 Nm

**403C-07 / 403D-07**

- 37 Nm

**403C-11 / 403D-11**

- 51 Nm

**403C-15 / 403D-15(T)**

**403C-17 / 403D-17**

- 100.5 Nm

**404C-15 / 404D-15**

- 50.5 Nm

**404C-22 / 404D-22**

**404C-22T / 404D-22T**

- 100.5 Nm

## Tips!

Packningen för de fyrcylindriga motorerna ska vara av multi layer typ.  
Den gamla modellen av grafit typ ska inte användas.



**UNIVERSAL POWER**


## Övriga moment

### Ramlagerhalvor

- 402C-05 / 402D-05	- 403C-15 / 403D-15
- 403C-07 / 403D-07	- 403C-17 / 403D-17
- 403C-11 / 403D-11	- 404C-22 / 404D-22
- 404C-15 / 404D-15	- 404C-22T / 404D-22T
<b>23Nm</b>	<b>52Nm</b>

### Insex skruvarna som vevaxeln dras fast i motorblocket:

- 402C-05 / 402D-05	- 403C-15 / 403D-15
- 403C-07 / 403D-07	- 403C-17 / 403D-17
- 403C-11 / 403D-11	- 404C-22 / 404D-22
- 404C-15 / 404D-15	- 404C-22T / 404D-22T
A1 och A2 enligt bilden nedan <b>27 Nm</b> .	A1: <b>27 Nm</b> A2 <b>52Nm</b>

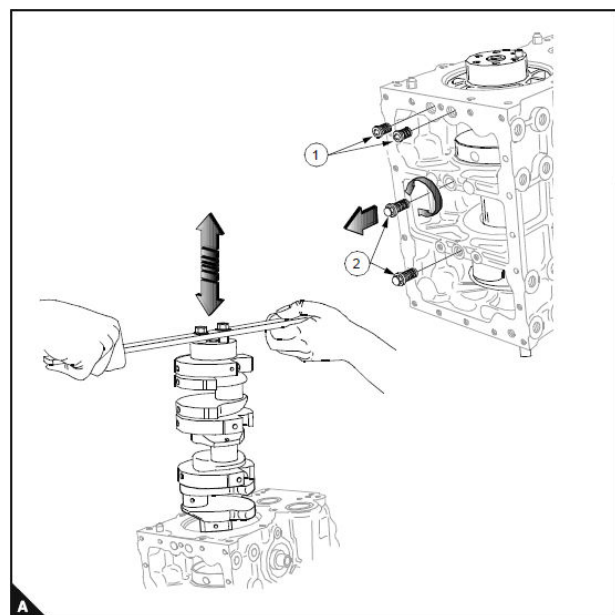

### Obs!

Se till att oljekanalerna i ramlagren passar ihop med oljekanalerna i motorblocket



**UNIVERSAL POWER**

**Vevlager:**

- 402C-05 / 402D-05 - 403C-07 / 403D-07	- 403C-11 / 403D-11 - 404C-15 / 404D-15	- 403C-15 / 403D-15 - 404C-22 / 404D-22 - 404C-22T / 404D-22T
<b>23 Nm</b>	<b>32 Nm</b>	<b>52 Nm</b>

**Remskiva:**

- 402C-05 / 402D-05 - 403C-07 / 403D-07	- 403C-11 / 403D-11 - 404C-15 / 404D-15	- 403C-15 / 403D-15 - 403C-17 / 403D-17 - 404C-22 / 404D-22 - 404C-22T / 404D-22T
<b>93 Nm</b>	<b>123 Nm</b>	<b>304 Nm</b>

**Svänghjul:**

- 402C-05 / 402D-05
  - 403C-07 / 403D-07
  - 403C-11 / 403D-11
  - 404C-15 / 404D-15
  - 403C-15 / 403D-15
  - 404C-22 / 404D-22
  - 404C-22T / 404D-22T
- 73.5 Nm**

**Obs!**

Se till att ytan mot vevaxeln är ren och utan skador.

**Spridare:**

- 402C-05 / 402D-05
  - 403C-07 / 403D-07
  - 403C-11 / 403D-11
  - 404C-15 / 404D-15
  - 403C-15 / 403D-15
  - 404C-22 / 404D-22
  - 404C-22T / 404D-22T
- 64 Nm**

**Obs!** 402C/D-15 och 403C/D-07 har dubbla spridarbrickor med olika diameter.



**UNIVERSAL POWER**